REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	P01	PRELIMINARY	05/05/2017	
	P02	UPDATE TO GTC EAR99. UPDATED WEIGHTS	06/26/2019	

NOTES: UNLESS OTHERWISE SPECIFIED

1. INDICATED DIMENSIONS ARE FOR AN ARRAY SIZE OF 640x512@12µm.
2. CONECTOR INTERFACE: HIROSE DF40C-80DP-0.4V(51). MATING CONNECTOR HIROSE DF40C(4.0)80DS-0.4V(51). FOR PIN-OUT DESIGNATIONS SEE BOSON CAMERA USER MANUAL.
3. INDICATED ALLOWABLE TRAVEL FOR FOCUS (±0.50mm).
4. CAMERA WEIGHT NO LENS 13.57 GRAMS, LENS WEIGHT, 24.0mm-f1.0: 36.60 GRAMS. TOTAL CAMERA WEIGHT: 50.17 GRAMS

5. THE INDICATED SURFACE IS THE MOST OPTIMAL MOUNTING/HEATSINKING SURFACE IN ORDER TO PROVIDE THE MOST UNIFORM THERMAL PERFORMANCE OF THE BOSON CAMERA CORE.

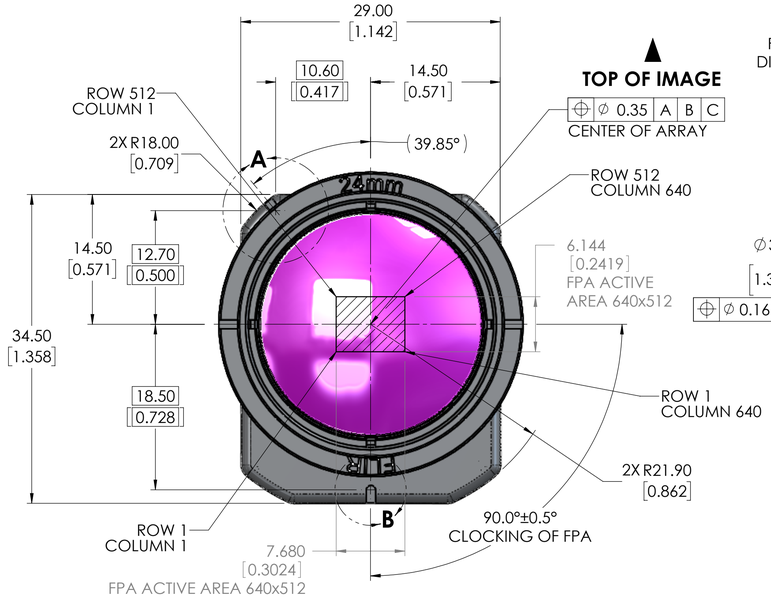

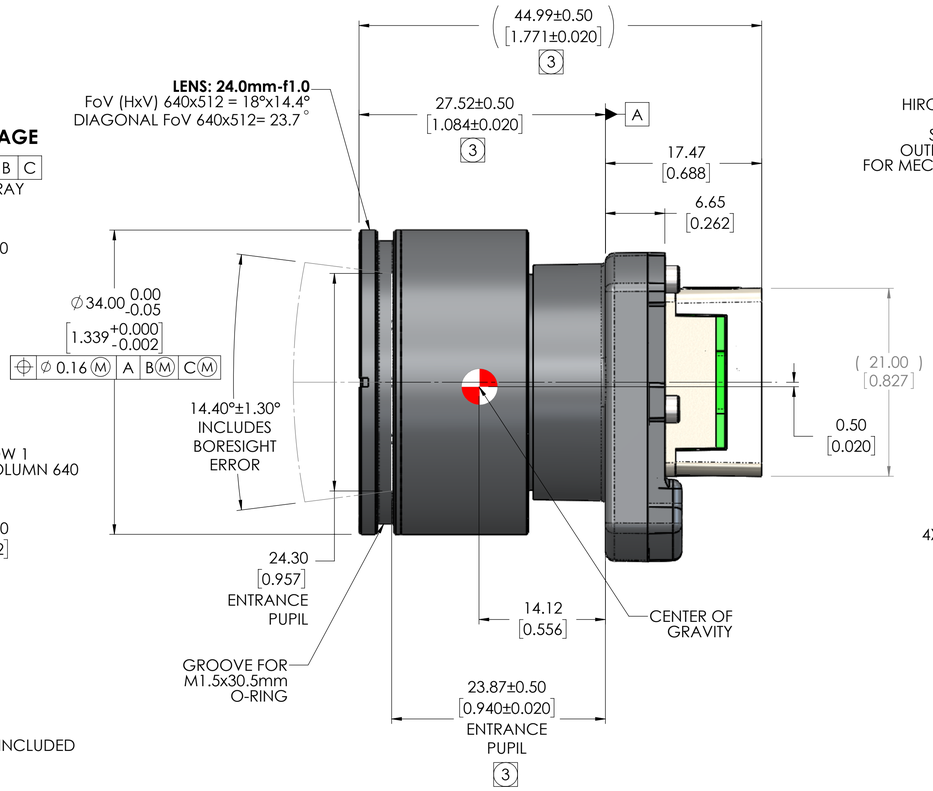

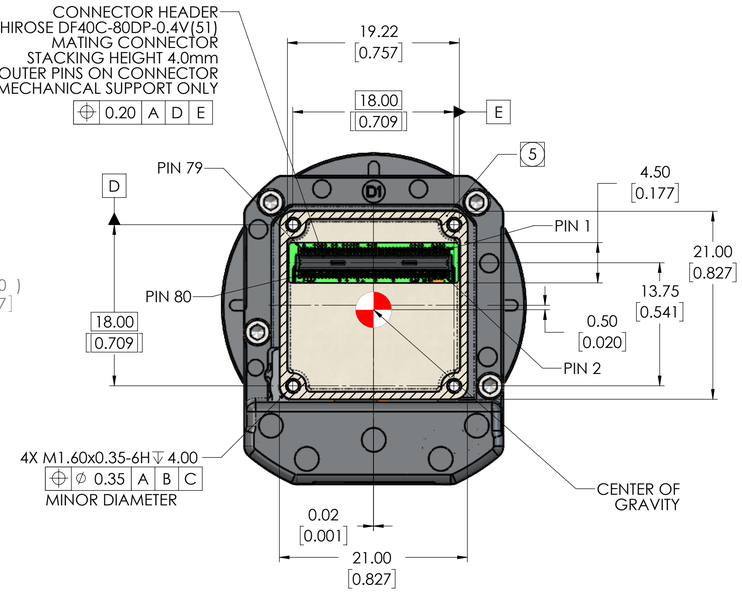

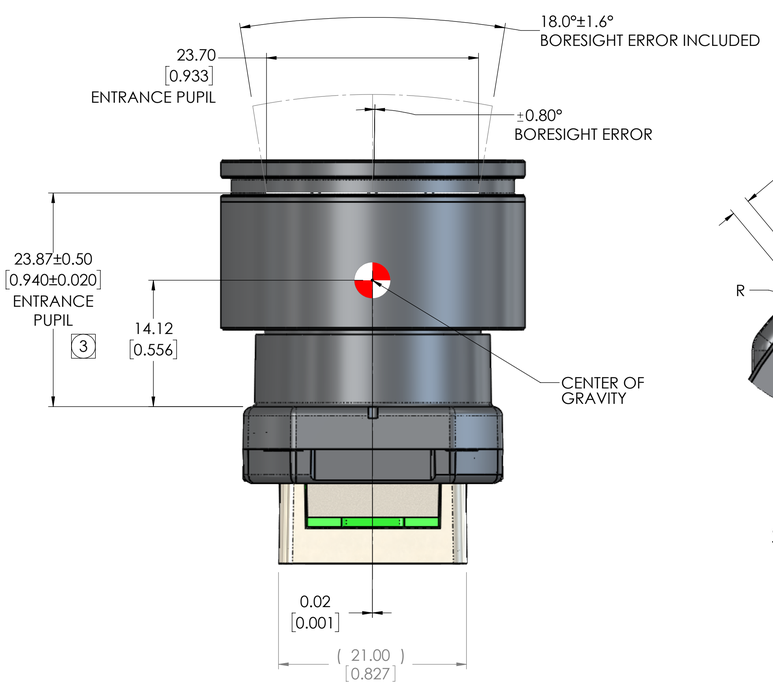



DETAIL A
SCALE 6 : 1



DETAIL B
SCALE 6 : 1

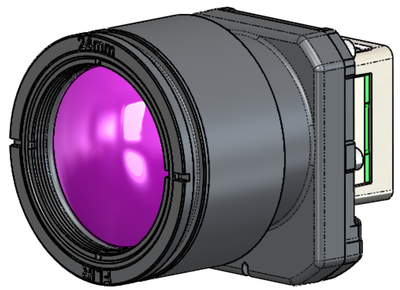

THIRD ANGLE PROJECTION	PROPRIETARY - FLIR SYSTEMS, INC. THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION TO FLIR SYSTEMS, INC. THIS INFORMATION MUST BE MAINTAINED IN CONFIDENCE AND USED ONLY IN A MANNER CONSISTENT WITH THE DOCUMENTATION AND ANY EXECUTED NON DISCLOSURE AGREEMENT, AND MAY NOT BE DISCLOSED TO ANY THIRD PERSON WITHOUT FLIR'S WRITTEN CONSENT.`
	THIS DOCUMENT DOES NOT CONTAIN ANY EXPORT-CONTROLLED INFORMATION.
METRIC	
INTERPRET DRAWING PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS 32 .X = ±.25 .XX = ±.13 ANGULAR = ±.5° FILLET RADII = .13 MAX	MATERIAL FINISH UNLESS OTHERWISE SPECIFIED ALL MEASUREMENTS ARE IN MM. ALL DIMENSIONS IN [ ] ARE INCHES. DO NOT SCALE DRAWING. CALC WT:

PROJECT NO.	APPROVALS	DATE
DWN	COVINGTON	05/05/17
CHK		
DSGN		
ENG		
APP		

FLIR Systems, Inc.
6769 Hollister Ave
Goleta, CA 93117

TITLE: **BOSON CAMERA CORE ASSEMBLY 24.0mm-f1.0 9Hz**

SIZE	CAGE	DWG NO.	REV
D	064Y2	20-640 24.0mm-f1.0	P02

SCALE 3:1 | PRINTED: 4/27/2020 | SHEET 1 OF 1

SOLIDWORKS MODEL: 20-Boson Camera Core
MODEL REVISION: N

DWG NO. 20-640 24.0mm-f1.0 | SH 1 | REV P02