



Videology

Industrial-Grade Cameras

an inTEST Company

2.1MP 1080p Ultra Sensitive 36X Auto Focus Zoom Camera with LVDS, EX-SDI, & CVBS 24Z2.1WS-36X Preliminary

Superior Color Sensitivity to 0.001 Lux

- 2.1 MP Sony 1/2" image sensor
- 1080p/720p 60/50/30/25fps
1080i 60/50fps
- Auto focus zoom
- 36x optical zoom, 32x digital zoom
- Real time true WDR @ 100dB
- Digital noise reduction
- Extended SDI
 - Transmissions to 500m (1650ft.)
 - Full HD digital format using standard cabling - coax, cat5/6
 - Latency <1 fps.
- HD-SDI requires an add-on converter (model 60TR000X) (see Accessories for options)
- LVDS, EX-SDI, CVBS



Technical Specifications

Electrical		24Z2.1WS-36X
Image Sensor		2.1 MP Sony Exmor™ 1/2" format sensor
Total Pixels		1952 (H) x 1113 (V) 2.17MP
Active Pixels		1937 (H) x 1097 (V) 2.12MP
Scan Mode		Progressive
Sync. System		Internal
Resolution	Digital	1080p, 720p (60/50/30/25 fps) 1080i (60/50 fps)
	Analog	>700 TVL (NTSC/ PAL)
Min. Illumination	1/30s	Color: 0.01 lux, B&W: 0.002 lux
	DSS 1/7.5s	Color: 0.001 lux, B&W: 0.0002 lux
Wide Dynamic Range		100dB
Video Output		LVDS / EX-SDI / CVBS analog
Communication		Visca / Pelco-D / Pelco-P
Power Supply		9VDC to 15VDC
Current Consumption		500mA

Parameter Controls

Focus	Auto/ Trigger/ Manual	
Distance Presets	0.1m/ 1.5m/ 3.0m/ 5.0m/ 10.0m	
Zoom	Optical	36x
	Digital	Off/ up to 32x
Exposure	Auto/ IRIS.P/ SHUT.P/ Manual	
Gain Control (AGC)	0-10 steps	
Shutter Speed	Auto 1/30 (NTSC), 1/25 (PAL)-1/60,000 sec.	
Iris	0 - 20 steps	
Digital Slow Shutter	Off / x2 / x4 / x8 / 16x / 32x / (64x: 60 or 50 fps mode only)	
Brightness	0 - 20 steps	
WDR / BLC	Off/ WDR/ BLC	
Day & Night	Auto/Day (color)/ Night (B/W)/ External Input	
White Balance	Auto/ Push to Set/ Manual/ Indoor/ Outdoor/ Auto-Ext	
HLC	Off/ On/ Night Only	
DNR	Auto/ Off/ Low/ Middle/ High	
Mirror	Off/ H (mirror)/ V (flip)/ H&V	
Edge Enhancement	0 - 10 steps	
Adaptive Contrast Enhancer	Off/ Low/ Middle/ High	
Defog	Off/ On (Auto/ Manual)	
Privacy Mask	Off/ 24 Positions	
Motion Detection	Off/ 3 Positions	
Pixel Detection	Off/ On	

Environmental

Operating Temperature	-10°C - 50°C (14°F - 122°F)
Storage Temperature	-20°C - 60°C (04°F - 140°F)

www.videologyinc.com


HEADQUARTERS LOCATION

Videology Industrial-Grade Cameras
35 Hampden Road
Mansfield, MA 02048 | United States


EUROPE LOCATION

Videology Industrial-Grade Cameras
High Tech Campus 5
5656 AE Eindhoven | The Netherlands

dimensions: mm



FRONT

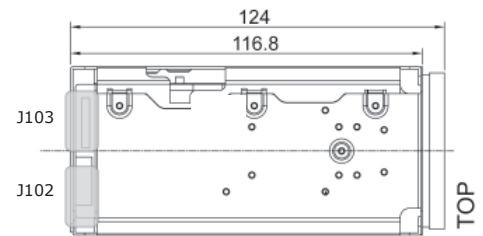

TOP

J102 FPC FFC 0.5 MM 24POS

01 GND	13 485-DIR
02 TxD	14 Reserved
03 RxD	15 GND
04 TWI_SCL	16 +5V
05 GND	17 GND
06 TWI_SDA	18 CVBS
07 GND	19 GND
08 ADKEY	20 DC IN
09 Reserved	21 DC IN
10 D/N-IN	22 DC IN
11 Reserved	23 DC IN
12 MD-OUT	24 DC IN

J103 USL00-30L-C (KEL) 0.4MM-30POS

01 TXOUT3+	16 DC IN
02 TXOUT3-	17 DC IN
03 TXCLKOUT+	18 DC IN
04 TXCLKOUT-	19 GND
05 TXOUT2+	20 GND
06 TXOUT2-	21 TXOUT7+
07 TXOUT1+	22 TXOUT7-
08 TXOUT1-	23 TXOUT6+
09 TXOUT0+	24 TXOUT6-
10 TXOUT0-	25 EXSDI+
11 GND	26 EXSDI-
12 TxD	27 TXOUT5+
13 RxD	28 TXOUT5-
14 DC IN	29 TXOUT4+
15 DC IN	30 TXOUT4-

Mechanical

Dimensions WxHxD	55.6mm x 64mm x 124mm (2.2" x 2.5" x 4.9")
Weight	400g (14oz)

Lens

Lens	Lens Type	36X Day/Night Zoom Lens		
	Zoom Ratio	Optical 36x, Digital 32x		
	Focal Length	f = 6.0mm - 216mm		
	Aperture Ratio	F1.5 (Wide) - F4.8 (Tele)		
	Field of View (DxHxV)	Wide	63.31°	56.5°
		Tele	2.4°	2.12°

Accessories

	EX-SDI - HD-SDI	
Transmitter/ Receiver Packages	Coax	60TR0001 (270MHz ver 1.0)
	UTP	60TR0004 (270MHz ver 1.0)
	UTC	60TR0003 (270MHz ver 1.0)
Repeater	Coax only	60RP0001 (270MHz ver 1.0)

See application note for more details.



Excellence.
Every day. Every time.